


STEREOVIEW 3D 2.2 / 2.5 / 2.8


SILVER SCREENS

The **STEREOVIEW Silver Screen** is considered the optimal 3D surface. It offers the best signal-to-noise ratio in the industry and the most resistant coating on the market. With three gain options available the surface is adaptable to any project requirements. Also excellent for 2D applications.

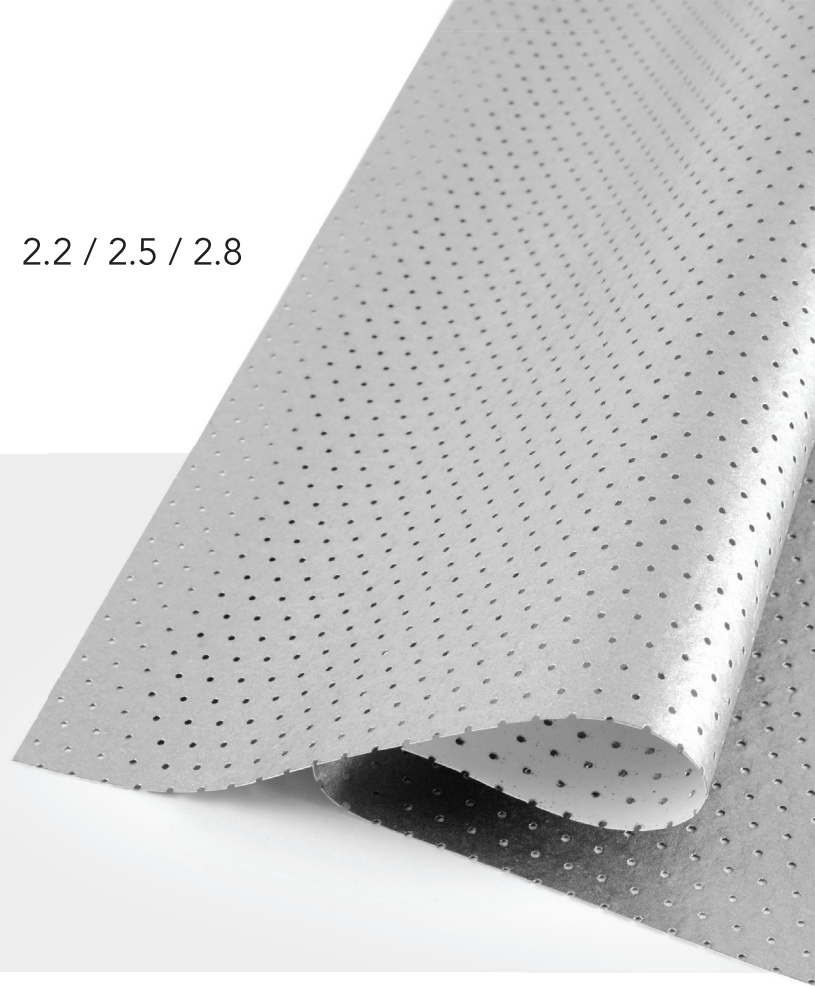

TECHNICAL SPECIFICATIONS

Gain	2.2 / 2.5 / 2.8 (+/- 5% on-axis) more gain options available upon request
Signal to noise ratio	200+ / 250+ / 270+
Perforation options	Non-perforated, Standard (4.5% void) and Micro (8.5% void)
Surface	Textured PVC with High Gain Aluminum Coating
Material width	54" – 1.37 m
Thickness	Approx. 15.5 mil – 0.39 mm
Weight	Approx. 0.1 lb/ft ² – 488 g/m ² (with standard perforation)
Fire retardancy	NFPA-701, CAN/ULC S109-3, AS1530.3-1999, BS 5867-2008 Part 2, M2, Japan (regulation requires certification from importing company). Please contact us for additional certification requirements
Edging	PVC grommets every 9 inches center to center. Pipe pockets, velcro, snaps and other edging options available upon request
Packaging	Rolled on a cardboard tube and inserted into a highly resistant carton or box

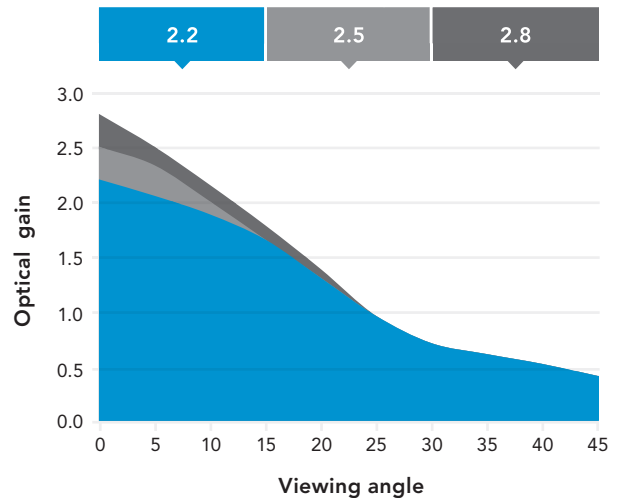

MDI

1 877 755-3795
strong-mdicinema.com