

OMNIVIEW

WOVEN PROJECTION FABRIC SCREEN



OMNIVIEW is the ultimate woven fabric screen material designed to transform your viewing experience. OMNIVIEW is perfect for situations where speakers need to be positioned close to the back of the screen, or when traditional perforations might compromise the visual quality.

Experience unmatched versatility with OMNIVIEW's dual-sided optimization for front projection. Additionally, in rear projection scenarios, OMNIVIEW provides a superior image quality with no hot spots.

Note that OMNIVIEW is not compatible with motorized screens.



TECHNICAL SPECIFICATIONS		
Gain	Front Projection	0.80 (± 5% on-axis)
	Rear Projection	0.24 (± 5% on-axis)
Perforation options	Acoustically transparent without additional perforation.	
Surface	Woven fabric Minor sheen / matte weave	
Material height	Maximum 192" – 4,8768 m	
Roll length	50M (164')	
Thickness	Approx. 0.5mm (500um)	
Weight	Approx. 0.053 lb/ft ² – 260 g/m ²	
Fire retardancy	NFPA 701-2010, TM #1 German DIN 4102, B1	
Edging	Available with grommets or a combinaison of snaps and Velcro.	
Packaging	Folded in a cardboard box or rolled on a cardboard tube and inserted into a highly resistant carton or box.	

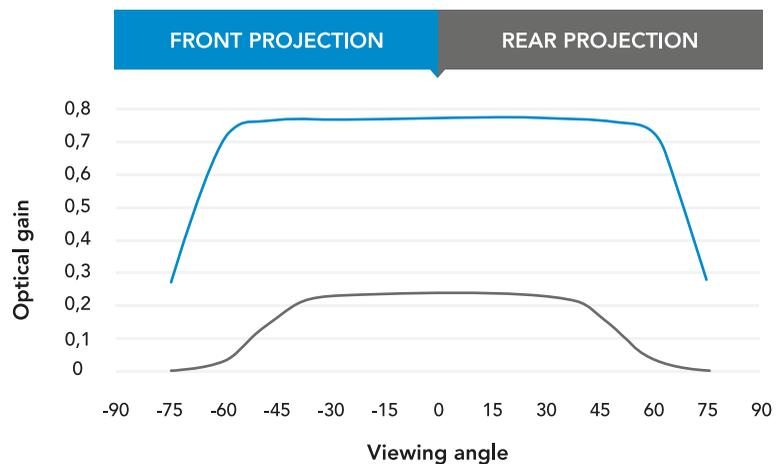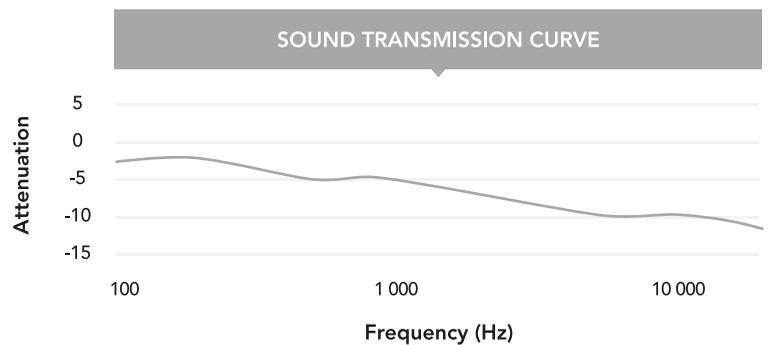

SCREEN MAINTENANCE

If the screen is dusty or stained with a volatile substance, cleaning with compressed air is recommended. To avoid leaving marks, if there is a non-volatile stain on the screen, the use of a liquid product is NOT recommended.

Please note that the screen can be removed and washed in its entirety in a washing machine suitable for its size on a delicate cycle. The screen can be tumble dried at a low temperature.