

STRONG | MDI

SCREEN PERFORATION


STANDARD PERFORATION

Engineered for large venues and cinema, **Strong | MDI's** standard perforation pattern provides flawless image reproduction when used in conjunction with any type of high-performance projector. Optimized sound transmission and minimal light loss allow both projectors and speakers to operate at lower levels of output.

∅ 1,25 mm (0,05")

5,538 mm (0,22")

10,05 mm (0,4")

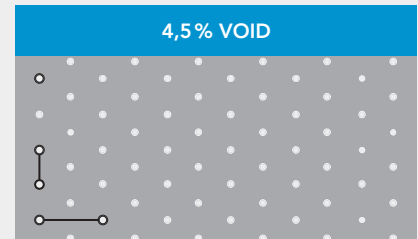

Holes per square foot: 3 325
Holes per square meter: 35 770


MICRO PERFORATION

Strong | MDI recommends using the micro perforated screen when viewers are seated closer than 16 feet from the screen surface. The nearly invisible holes provide excellent sound transmission and maintain the surface's slight reflectance properties.

∅ 0,55 mm (0,02")

2 mm (0,08")

6,8 mm (0,27")

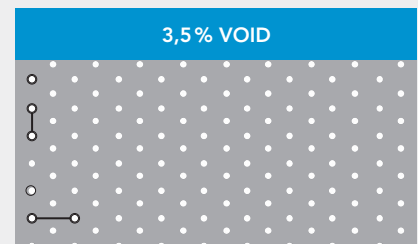

Holes per square foot: 13 645
Holes per square meter: 146 895

SOUND TRANSMISSION CURVE

